



GIASCO

SAFETY SHOES



TM

BOOK 2020

GIASCO

SAFETY SHOES



TM

MANAGEMENT SYSTEM CERTIFICATE

DNV - GL

SINCE 1971

MADE IN ITALY





DESIGN

PROMPT DELIVERY



TESTING




PRODUCTION AND
AUTOMATION





TECHNOLOGY

3PU INJECTION SEQUENCES



 3D è una tecnologia rivoluzionaria brevettata che permette di offrire l'unica calzatura con 3 diversi strati di poliuretano iniettati su tomaia. Obiettivo di questo prodotto è quello di offrire Sicurezza, il massimo Comfort e una sicura Stabilità del piede grazie alle 3 densità che caratterizzano i vari strati della suola.

 3D is a patented revolutionary technology that allows us to offer the only shoe with 3 different layers of polyurethane injected on the upper. The aim of this product is to offer Safety, maximum Comfort and Secure foot stability thanks to the 3 densities that characterize the various layers of the sole.



 3D ist eine revolutionäre und patentierte Technologie, die es gestattet einen einzigartigen Schuh mit drei verschiedenen Schichten aus in das Oberleder injiziertem Polyurethan anzubieten. Das Ziel dieses Produkts ist es, dem Fuß dank der drei unterschiedlichen Dichten der verschiedenen Schichten der Sohle einen maximalen Komfort sowie eine sichere Stabilität zu bieten.

 3D est une technologie révolutionnaire brevetée qui nous permet d'offrir la première chaussure avec 3 couches différentes de polyuréthane injecté sur la tige. Le but de ce produit c'est d'offrir sécurité, un confort optimal et de garantir la stabilité du pied grâce aux 3 densités qui caractérisent les différentes couches de la semelle.

 3D es una tecnología revolucionaria patentada que nos permite ofrecer el único zapato con 3 niveles diferentes de poliuretano inyectados en el corte. El objetivo de este producto es ofrecer seguridad, el máximo confort y una estabilidad segura del pie gracias a las tres densidades que caracterizan las distintas capas de la suela.

3RUN
3CROSS

3CROSS

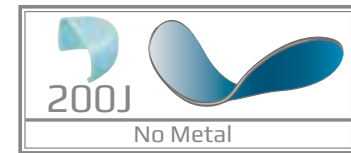SRC
ANTI-SLIPPING SOLE*extra
LIGHT
shoes*

ANTI-TORSION INSERT

TILTED HEEL TO
IMPROVE THE WALKING

BENDING POINT

ANTI-SLIPPING HEEL

ANTISHOCK





3PU PATENT


GIASCO
SAFETY SHOES  TM



NEW

TEIDE S1P
36-47

3C094T



NEW

K2 S3 CI
39-47

3C149E



NEW

ELBRUS S3
36-47

3C198N



NEW

KAMET S3 CI
39-47

3C122D

FIREPROOF THREAD



NEW

MAKALU S3 CI WR
39-47

3C058G



NEW

HIMALAYA S3 CI WR
39-47

3C178E



GIASCO 
SAFETY SHOES TM



NEW

AINOS S3
36-47

3C022C



NEW

EIGER S3
39-47

3C022H



NEW

THOMSON SB FO E P CI WRU
3C060D

38-47



ASTM 2413-11


C.S.A. Z195-14

INSULATING SOLE
FROM >1000 MΩ

NEW

SINAI S1P
36-47

3C182T



NEW

ANETO S3
36-47

3C1910





NEW

TRIVOR S3
36-47


3C1980





SRC
ANTI-SLIPPING SOLE

*extra
LIGHT
shoes*





GIASCO  TM
SAFETY SHOES



HURRICANE S3
39-47

3R171V



LESTE S1P
36-47

3R171Q



BERG S3
39-47

3R171R



SHAMAL S3
36-47

3R173O



LIBECCIO S1P
36-47

3R085N



OROSHI S1P
36-47

3R172T





MARIN S1P
36-47

3R174C



NEW

HELM S3
39-47

3R137N



LODOS S1P
36-47

3R163T



ZEFIRO S1P
36-47

3R163O



NORTE S3
36-47

3R164N



GIASCO  SAFETY SHOES TM



BURAN S3
36-47

3R1910



CIENZO S3
36-47

3R1980



CALIMA S1P
36-47

3R182V



GIBLI S1P
36-47



3R182T



SARMA S1P
39-47

3R148T





SRC
ANTI-SLIPPING SOLE

PERFECT GRIP


G-GEL ANTISHOCK

TO REDUCE IMPACT STRESS ON THE
BODY AND TO GIVE ENERGY
RETURN DURING THE WALK



*extra
LIGHT
shoes*

HIDDEN
OUTSOLE
TECHNOLOGY

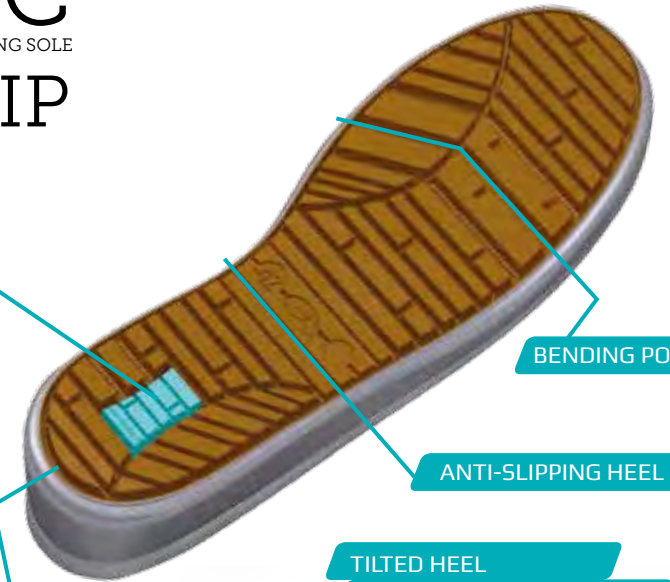


CITY

ANTISTATIC PU/PU
DOUBLE DENSITY SOLE



LAS VEGAS S1P
35-47

CT154NC



PORTLAND S1P
39-47

CT154EV



NEW YORK S1P
39-47

CT158EV





FLORIDA S1P
39-47

CT145N



LONDON S3
39-47

CT154NR



ROME S3
39-47

CT158NR



ARIES S3
39-47

CT025H



ATLANTA S3
39-47

CT151D



KANSAS S3
39-47

CT137N





DETROIT S1P
35-47

CT141NC



GEORGIA S1P
35-47

CT141T



PARIS S3
35-42

CT152T



ISTANBUL S3
37-47

CT1810



MALTA S2
35-47

CT002I



BUDAPEST S1P
35-47

CT095I



GIASCO  **SAFETY SHOES** TM

20347 PROFESSIONAL 



SNAKE 02 FO C71810
36-47



SPIDER 01P FO C7154N
36-47



CROW 01 FO C70440
36-47



MALMO 02 FO CI C70250
36-47



LUTON 03 FO C70680C
36-47



EAGLE 02 FO C7004I
36-47





CAT 08 FO AE C7007I
36-47






KUBE


BEST SLIPPING RESISTANCE



*extra
LIGHT
shoes*



SRC
ANTI-SLIPPING SOLE

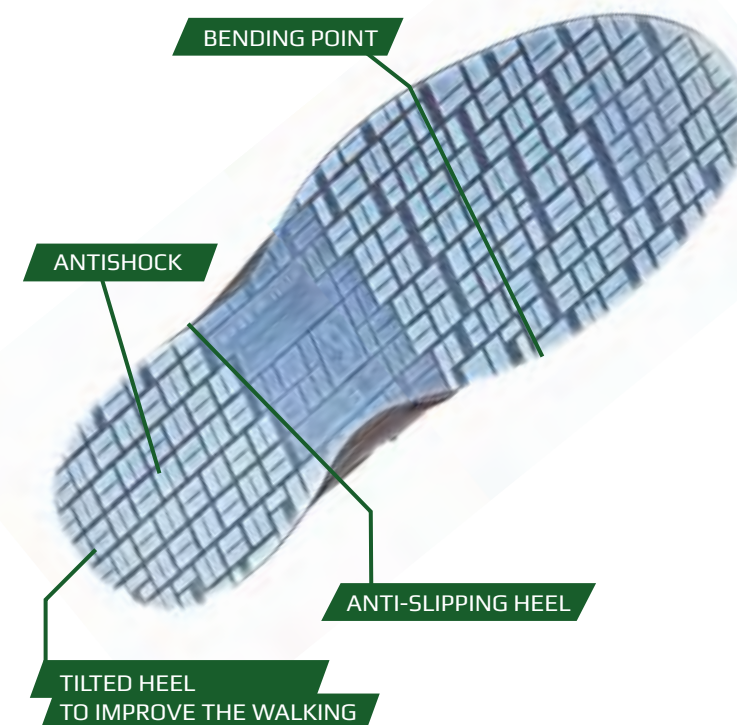

ROOF GRIP UNI 11583:2015

COEFFICIENTE D'ATTRITO SECONDO LA PROVA UNI EN ISO 13287
FRICTION COEFFICIENT ACCORDING TO THE TEST UNI EN ISO 13287
ANTISTATIC PU/PU - DOUBLE DENSITY SOLE



NORDIC S3
36-47

KU043N



BOXE S3
39-47

KU065N




KARATE S3
39-47

KU069N



MIAMI S1P
35-47

KU093N



GOLF S3
39-47

KU142E



LIBRA S3
39-47

KU048E






SURF S1P
36-47

KU1630



RUGBY S3
36-47

KU025N




BASKET S3
36-47

KU037N



CARBON S1P
39-47

KU224E



FRESH S1P
39-47

KU124KV



PAINT S1P
35-47

KU125K





BIKE S1P
35-47

KU141T



DANCE S1P
35-42

KU055HF



JUNG P3 CI KU168OVX **JUNG S3 CI** KU168OV
35 36-47



PERÙ S1P
34-47

KU095T



BOSTON S3
36-47

KU051L



FARRIER S3 CI
39-47

KU017L





PANAMA S1P
35-49

KU083T



KAYAK S3
36-47

KU025T



SOFTBALL S3
39-47

KU037T



VOLARE S3
35-47

KU073T



YORK S3
35-49

KU061D



OXFORD S3
35-49

KU068D



GIASCO

SAFETY SHOES  TM




MEDINA S2
35-47

KU0020



VILNIUS S3
36-47

KU0250




FREE SB FO A E
36-47

KU0070




POLO S2
34-49

KU0021



STOCKHOLM S2
39-47

KU0251



HELSINKI SB FO A E
36-47

KU0071




BALTIC S2
35-47

KU0201




CONSTANTA S2
37-47

KU8801



ICEBERG S2 CI
37-47



KU0111





RUBBER 4X4

ANTISTATIC PU / RUBBER SOLE



SRC PERFECT GRIP
ANTI-SLIPPING SOLE



CROSS S1P HRO 4X141T
39-47



WELDER S3 CI HRO 4X122D
39-47

FIREPROOF THREAD



RALLY S3 CI HRO 4X224N
39-47



GUN S3 CI HRO 4X165N
39-47




SAFARI S3 CI WR HRO 4X169N
39-47





ERGO SAFE


ANTISTATIC PU/PU
DOUBLE DENSITY SOLE



*extra
LIGHT
shoes*



SRC
ANTI-SLIPPING SOLE

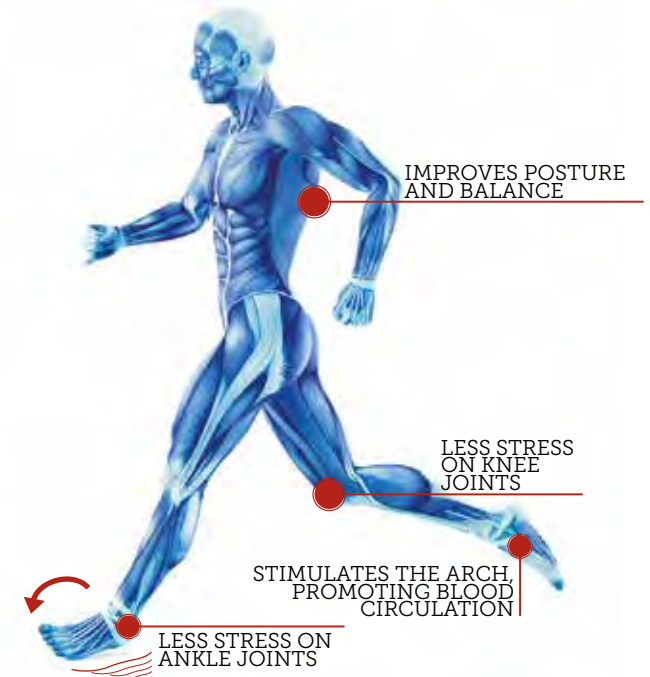



HAITI S1P
36-47

71N93C

CLASS 3



SPORT S3
36-47

73N25C
 
HIGH VISIBILITY CLASS 3



GYM S3
36-47

73N37C
 
HIGH VISIBILITY CLASS 3



NEW

HOCKEY S1P
36-47

ER174C
 
HIGH VISIBILITY MICROBAN



NEW

PADDLE S1P
36-47

ER171Q



NEW

TENNIS S1P
36-47

ER172T


GIASCO


SAFETY SHOES  TM



FLASH S1P ER1630
36-47



FITNESS S1P ER154NC
36-47



SANTA FE S1P 71T83C
36-47



HAWAII S1P ER125K
36-47



SOCCER S3 ER025T
36-47



VOLLEYBALL S3 ER037T
39-47



LIMA S1P 71T95C
36-47



ARENDAAL S2 72002
36-47




BERGEN S2 72102
36-47



BLOOM

ANTISTATIC PU/PU
DOUBLE DENSITY SOLE

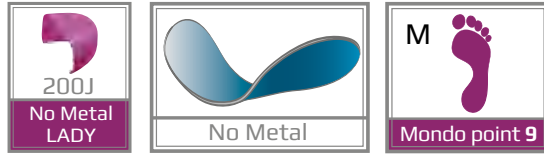

SRC

ANTI-SLIPPING SOLE



extra
LIGHT
shoes

2 laces



LILY S3
36-41

BL1020




MICROWASH



COMFORT PLANT XXL

24HOURS

ANTISTATIC PU/PU
DOUBLE DENSITY SOLE

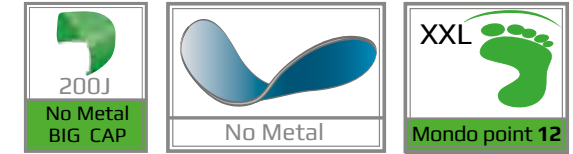

SRC

ANTI-SLIPPING SOLE



BADEN S3
39-48

33N42C



SYDNEY S3
39-48

33L74C



CLASS 3



CANBERRA S3 WR 33L77C
39-48




WR





STABILE

ANTISTATIC PU/PU
DOUBLE DENSITY SOLE



SRC
ANTI-SLIPPING SOLE


EXTRA PROTECTION OVER CAP



KOLN S3 CI WR TO058L
39-47



DEFENDER S3 CI WR AN TO159D
39-47



UTRECHT S3 CI WR TO259L
39-47





ESSEN S3 CI TO165N
39-47



HANNOVER S3 CI WR TO169N
39-47



RED S3 CI TO157D
39-47



BERLIN S3 TO065N
39-47



BAYERN S3 TO069N
39-47



ORLANDO S3 CI TO017L
39-47




MALAGA S3
 39-47

TO061D


GRANADA S3
 39-47

TO068D


STRAUSS S3
 39-47

TO880BP


BILBAO S3
 39-47

TO167V


ALASKA S3 CI WR
 38-47


TO084B


DAKOTA S3 CI
 39-47

TO011D


TITAN S3 CI
 39-47



TO011G





ACTION

ANTISTATIC PU/PU
DOUBLE DENSITY SOLE



*extra
LIGHT
shoes*



SRC
ANTI-SLIPPING SOLE

PERFECT GRIP



DALLAS S3 CI WR AC053N
39-47



DENVER S3 CI WR AC057N
39-47



HAMBURG S3 CI WR AC058L
36-49





SALVADOR S3
39-47

AC003D



CUBA S3
36-47

AC049D




GULF S3
39-47

AC011A




STEEL RM S3
38-47

AC141DRM



IRON RM S3
37-47

AC068DRM



SOLDADOR S3
39-47


AC880BSP






KENT S3
36-51

AC061D



CAMBRIDGE S3
36-51

AC068D



VIVALDI S3
36-47

AC888B



MOZART S2
AC810B
36-47

MOZART S3
AC810BP
36-49



VERDI S2
AC880B
36-47



VERDI S3
AC880BP
36-49



VERDI S3 R
39-47

AC880BRP





HRO 300°C SOLE






-30°C SOLE

HARD ROCK

ANTISTATIC PU / RUBBER SOLE

ANTISTATIC PU
RUBBER SOLE



SRC
ANTI-SLIPPING SOLE

HEAT INSULATION HI



FOR MECHANICAL WORKERS



PERFECT GRIP



GIENK S3 CI HI HRO HR051L
37-47



KIEL S3 CI HI WR HRO HR058L
37-48



CAIRO S3 CI HI HRO HR068D
39-47



ERCOLANO S3 HI HRO HR066D
39-47



ALPI S3 CI HI WR HRO HR058G
37-47



ARIZONA S3 CI HI HRO HR158NR
39-47


 

GIASCO  TM
SAFETY SHOES



QUEBEC S3 CI HI WR HRO

HR178E
39-47



FUR


WINTER S3 CI HI WR HRO

HR011L
39-47



ARTIC S3 CI HI WR HRO

HR179E
39-47

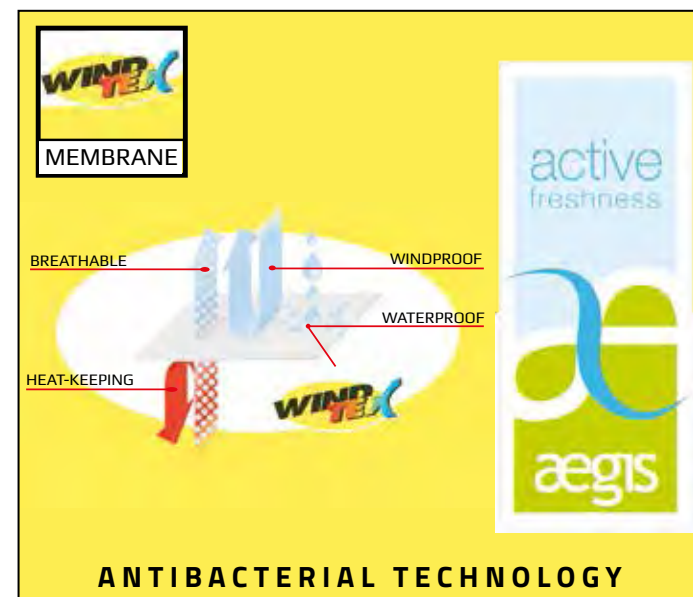

C.S.A. Z195-14

HARD ROCK INSULATING line exceeds requirements fixed from the Canadian norm CSA for electrical resistance. Determination of Electric Shock Resistance to a potential of **20.000 V, 60 HZ, FOR A PERIOD OF 1 MIN**

INSULATING SOLE
from > 1000 MΩ

The bottom of the shoe, within some limits (no humidity, it does not concern the upper), offers electrical resistance against tension up to 1.000V - M Ω > 1.000



ASTM 2413 - 11

HARD ROCK INSULATING line exceeds requirements electrical resistance (EH) in accordance with ASTM 2413 - 11 electric hazard - Voltage: **20.000 V** / 60 Hz - duration: 1 min. - requirement of the electrical flow lower than 1.0 mA.



VOLT SB FO E P HRO
HRD055H
39-47



HERTZ SB FO E P HRO
HRD154T
39-47



FRANKLIN SB FO E P WRU HRO
HRD052T
37-47



EDISON SB FO E P CI HI WRU HRO
HRD060D
37-47



AMPERE SB FO E P CI HI WRU HRO
HRD037T
39-47



TESLA SB FO E P CI HI WRU WR HRO
HRD057E
39-47



GIASCO  SAFETY SHOES TM



CLASSE 2
24 m/s

WOODCUT S3 CI HI WR HRO SRC

53L97C
39-47



35/36
37/38
39/40
41/42
43/44
45/46

SOLE



PESCI

39-47



MARTE GI S5

39-46



METAL



200J
Metal



MARTE V S5

39-46



METAL



200J
Metal



GIOVE P S4

39-46



200J
Metal



1000
36-49



MEMORY
36-47




4000
35-47



5000
32-49



DIELECTRIC
37-47

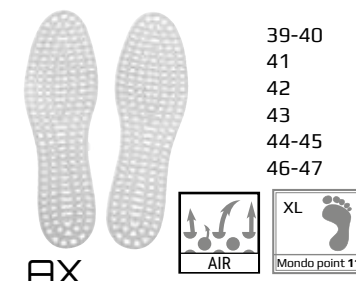

AX

39-40
41
42
43
44-45
46-47



GAS14-10
110 cm

GAS13-10
90 cm



GA600-10
80 cm



GA509-10
CM 67X32X28

UNI EN ISO 20344 UNI EN ISO 20345



SB=						
S1=SB+E+A						
S1P=SB+E+A+P						
S2=S1+WRU						
S3=S2+P						

UNI EN ISO 20346:2014



PB=						
P1= PB+E+A						
P2= P1+WRU						
P3= P2+P						

UNI EN ISO 20347



OB=						
O1= OB+E+A						
O2= O1+WRU						
O3= O2+P						



Resistenza della suola agli idrocarburi



Puntale 200J o 100J



Suola antiscivolo



Assorbimento energia nella zona del tallone



Calzatura antistatica



Tomaia idrorepellente



Resistenza della suola alla perforazione



Fondo isolante contro il calore



Fondo isolante contro il freddo



Calzatura resistente all'acqua



Suola resistente al calore per contatto



Protezione metatarsale



Protezione della caviglia



Sole resistance to hydrocarbons

Toecap 200J or 100J

Slipping resistant sole

Energy absorption of seat region

Antistatic footwear

Water resistant upper

Antiperforation midsole

Heat insulation of sole complex

Cold insulation of sole complex

Water resistant shoe

Outsole resistant to hot contact

Metatarsal protection

Ankle protection



Résistance de la semelle aux hydrocarbures

Embout 200J ou 100J

Semelle anti-dérapante

Absorption de l'énergie dans la zone du talon

Chaussure antistatique

Empeigne imperméable

Résistance de la semelle à la perforation

Isolation de la semelle de la chaleur

Isolation de la semelle du froid

Chaussure imperméable

Semelle résistante à la chaleur par contact

Protection métatarsienne

Protection de la cheville



Kohlenwasserstoff-beständige Laufsohle

Zehenschutzkappe 200J oder 100J

Rutschhemmende Laufsohle

Energieaufnahme im Fersenbereich

Antistatischer Schuh

Wasserabweisender Oberleder

Durchtrittssichere Zwischensohle

Wärmeisolierung der Sohle

Kälteisolierung der Sohle

Wasserabweisender Schuh

Hitzebeständige Sohle

Mittelfuß-Schutz

Knöchelschutz



Resistencia de la suela a los hidrocarburos

Puntera 200J o 100J

Suela antideslizante

Absorción de energía en la zona del talón

Calzado antiestático

Resistencia a la absorción y penetración del agua de la parte superior

Resistencia de la suela a la perforación

Suela aislante contra el calor

Suela aislante contra el frío

Resistencia a la absorción y penetración del agua

Resistencia de la suela al calor por contacto

Protección metatarsal

Protección tobillo

USA STANDARD

ASTM 2413-11
IMPACT/COMPRESSION





DGVU 112 - 191

... orthopädische Einlagenversorgung für Sicherheitsschuhe aus dem Hause

MANDER-MALMS
= Schuhtechnik GmbH =

www.mander-malms.de

SoftAstatic[®]
DAS VARIABLE EINLAGENSYSYTEM



CLASS 3



ESD NORMS

Conductive from 0 M Ω to 0,1 M Ω

ESD from 0,1 M Ω to 100 M Ω

Antistatic from 0,1 M Ω to 1000 M Ω

Dielectric from >1000 M Ω



ESD = ELECTRO STATIC DISCHARGE
IEC 61340-4-3:2017 (IEC 61340-5-1:2016)

GIASCO  SAFETY SHOES TM



XBAG NYLON



XPEN



XBAG SPORT



XDISPLAY



XTOTEM



XSTICKER



XMOUSE PAD



XPCITY

XP3RUN E

XPERGO E



XSHELF

MEDIA

WEBSITE



SOCIAL



MAGAZINE





3CROSS

Page 06



3RUN

Page 09



CITY

Page 13



KUBE

Page 17



**RUBBER
4X4**

ANTISTATIC PU / RUBBER SOLE

Page 23



ERGOSAFE

Page 24




**24HOURS
BLOOM**

Page 27



STABILE

Page 28



ACTION

Page 31



**HARD
ROCK**

ANTISTATIC PU
RUBBER SOLE

Page 34



**HARD
ROCK**

DIELECTRIC PU
RUBBER SOLE

Page 37



**BOOTS &
ACCESSORIES**

Page 38-39

GIASCO

SAFETY SHOES



BOOK 2020

